

Feature, advantage, and benefit statement about product .

Lifts for disabled people is very safe lifting device. That lifts have all safety components (emergency stops , light and beep indicators , safety frames , etc.) and slowly moving (till 0.15m/sec).

CONTENT

1.	Hydrotelescope console Lift	1 page
2.	VERTICAL ELECTRO MECHANICS LIFTS	2 PAGE
3.	STAIR LIFTS	3 PAGE
4.	VERTICAL HYDRAULIC LIFTS.....	4 PAGE
5.	SCISSORS TIPE LIFTS.....	5 PAGE
6.	BATH LIFTS (HIGH CAPACITY).....	6 PAGE
7.	INTALATION SCHEME.....	7 PAGE

DESCRIPTION

All lifts welded from steel S355.



MODELS

- Stair lifts
- Scissors type
- Console type
- Pool lifts
- Arm type



ADVANCED LOADING ASSISTANT



L I F T S F O R
D I S A B L E D P E O P L E

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50 , 55-asis
pastas , p/d 805 , LT-10312 ,
Vilnius , LITHUANIA.




Lifts for disabled

GALLERY

Hydrotiltai
of
LITHUANA

GALLERY



ADVANCED LOADING ASSISTANT



L I F T S F O R
D I S A B L E D P E O P L E

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
805, LT-10312, Vilnius,
LITHUANA.



Lifts for disabled

Console type 0.1-0.5tons

Lithuania
or
LITHUANA

AVAILABLE OPTIONS

- With swinging lip
- Optional color (standard RAL 1003).
- You company logo.


CAPACITY 0.5T

TECHNICAL SPECIFICATIONS

Made by standard (lifting platforms)	LST 1570-02-+A2
Capacity EN 1398 (kN)	3
Working pressure (MPa)	15
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm3)	5

Capacity—0.5 t
Lifting height 5.2m
Platform:
1.5m x1.4m
Lifting speed—0.15m/s
Landing speed—0.11m/s
Flash and light indicator


DESCRIPTION

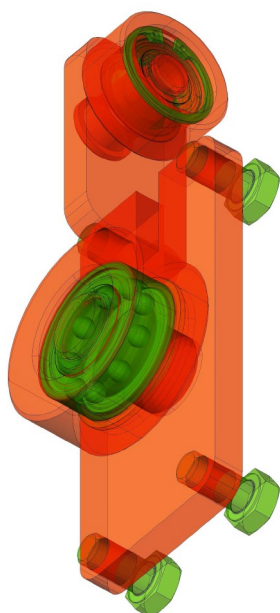

Rollaparat designed of engineers of our company. Lift work very softly and quietly. Made from SKF roll bearings and very hard technic plastic—ertalon.



SCHEMA



ATTENTION: .please keep load position as show in scheme

- RESIDENTIAL APPLICATION
- COMMERCIAL APPLICATION

ADVANCED LOADING ASSISTANT



SCISSORS LIFTS
FOR DISABLED
PEOPLE

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50 , 55-asis pastas , p/d
805 , LT-10312 , Vilnius ,
LITHUANIA.



Lifts for disabled

Console type 0.1-0.5tons

Produced
in
LITHUANIA

AVAILABLE OPTIONS

- With swinging lip
- Optional color (standard RAL 1003).
- You company logo.


CAPACITY 0.5T

TECHNICAL SPECIFICATIONS

Made by standard (lifting platforms)	LST 1570-02-+A2
Capacity EN 1398 (kN)	3
Motor power (W)	550
Working temperature °C	-25 +40


DESCRIPTION

Capacity—0.5 t
Lifting height 5.2m
Platform:
1.5m x1.4m
Lifting speed—0.15m/s
Landing speed—0.15m/s
Flash and light indicator

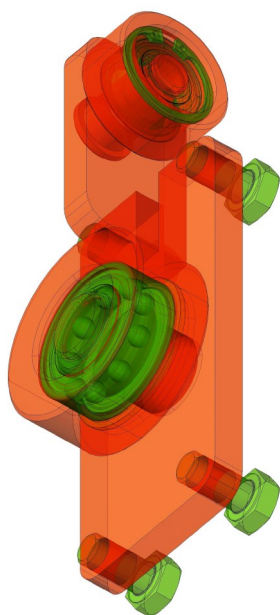

Rollaparat designed of engineers of our company. Lift work very softly and quietly. Made from SKF roll bearings and very hard technic plastic—ertalon.

SCHEMA



ATTENTION: .please keep load position as show in scheme

- RESIDENTIAL APPLICATION
- COMMERCIAL APPLICATION



ADVANCED LOADING ASSISTANT



SCISSORS LIFTS
FOR DISABLED
PEOPLE

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50 , 55-asis pastas , p/d
805 , LT-10312 , Vilnius ,
LITHUANIA.



Lifts for disabled

Stair type 0.1-0.15tons

Lithuania
or
LITHUANA

AVAILABLE OPTIONS

- With swinging lip
- Optional color (standard RAL 1003).
- You company logo.

CAPACITY 0.5T

TECHNICAL SPECIFICATIONS

Made by standard (lifting platforms)	LST I570-02-+A2
Capacity EN 1398 (kN)	3
Motor power (W)	180
Working temperature °C	-25 +40




DESCRIPTION

Capacity—0.1 t
Lifting height 1.2m
Platform:
1.1m x1.4m
Lifting speed—0.15m/s
Landing speed—0.15m/s
Flash and light indicator

NEKE	Max point of rise	Platform width	Platform length	Max load
	H (mm)	B(mm)	L(mm)	G(kg)
NEKE0.1_0.9x1.2_1.2	1200	900	1200	100
NEKE0.15_1.1X1.4_1.6	1600	1100	1400	150

SCHEMA

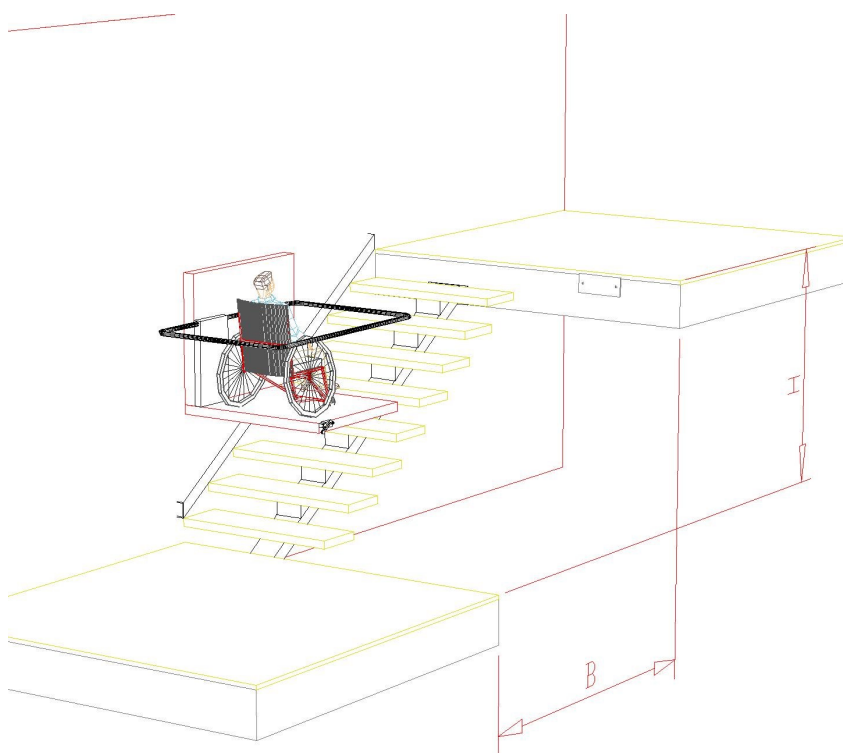

ADVANCED LOADING ASSISTANT



SCISSORS LIFTS
FOR DISABLED
PEOPLE

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
805, LT-10312, Vilnius,
LITHUANIA.



Lifts for disabled

Console type 0.1-0.5tons

Lithuania
or
LITHUANA

AVAILABLE OPTIONS

- With swinging lip
- Optional color (standard RAL 1003).
- You company logo.


CAPACITY 0.5T

TECHNICAL SPECIFICATIONS

Made by standard (lifting platforms)	LST 1570-02-+A2
Capacity EN 1398 (kN)	3
Working pressure (MPa)	15
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm3)	5

Capacity—0.5 t
Lifting height 5.2m
Platform:
1.5m x1.4m
Lifting speed—0.15m/s
Landing speed—0.11m/s
Flash and light indicator


DESCRIPTION

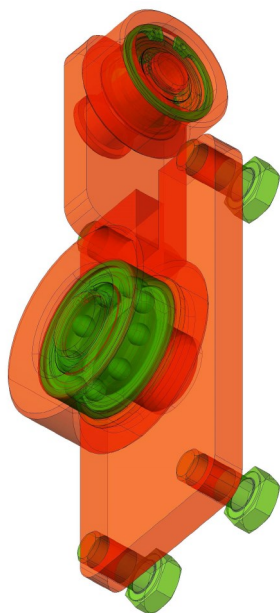

Rollaparat designed of engineers of our company. Lift work very softly and quietly. Made from SKF roll bearings and very hard technic plastic—ertalon.



SCHEMA



ATTENTION: .please keep load position as show in scheme

- RESIDENTIAL APPLICATION
- COMMERCIAL APPLICATION

ADVANCED LOADING ASSISTANT



SCISSORS LIFTS
FOR DISABLED
PEOPLE

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50 , 55-asis
pastas , p/d 805 , LT-10312 ,
Vilnius , LITHUANIA.



Lifts for disabled

Loading capacity 0.1-0.5tons
Scissors type

Lithuania
or
LITHUANIA

AVAILABLE OPTIONS

- With swinging lip
- Optional color (standard RAL 1003).
- You company logo.

CAPACITY 0.5T

TECHNICAL SPECIFICATIONS


Made by standard (lifting platforms)	LST 1570-02-+A2
Capacity EN 1398 (kN)	3
Working pressure (MPa)	15
Working temperature °C	-25 +40
Oil	NESTE 32
Oil tank capacity (dm3)	5

Capacity—0.2 t
Lifting height 1.2m
Platform:
1.5m x1.4m
Lifting speed—0.15m/s
Landing speed—0.11m/s
Flash and light indicator



HSN	Max point of rise H (mm)	Min point of landing h (mm)	Platform width B(mm)	Platform length L(mm)	Stroke (H-h) (mm)	Max load G(kg)
HSN0.2_0.9x1.5_1.2	1650	450	900	1500	1200	200
HSN0.45_1.2X1.8_1.8	2300	500	1200	1800	1800	450

DESCRIPTION

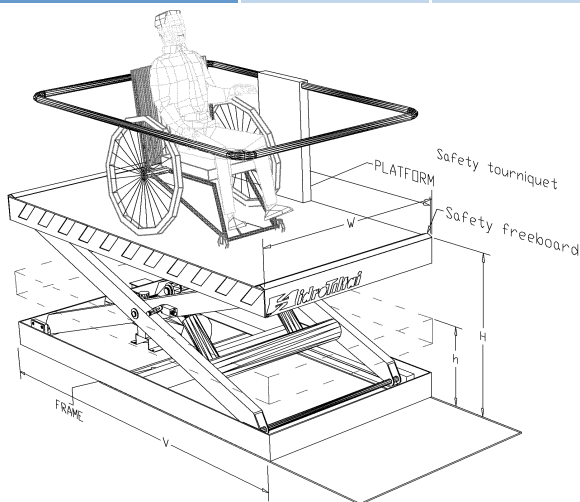

SCHEMA



ADVANCED LOADING ASSISTANT



SCISSORS LIFTS
FOR DISABLED
PEOPLE

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis
pastas, p/d 805, LT-10312,
Vilnius, LITHUANIA.



Lifts for disabled

▶ Loading capacity 0.1-0.5tons
Lifts for bath

Lithuania
or
LITHUANA

AVAILABLE OPTIONS

- With rotating seats
- Optional color (standard RAL 1003).
- You company logo.


CAPACITY 0.15T

TECHNICAL SPECIFICATIONS

Made by standard (lifting platforms)	LST I570-02-+A2
Capacity EN 1398 (kN)	1.5
Working temperature °C	-25 +40

Capacity—0.15 t
Lifting height 1.2m
Arm rotating—270degrees
Seat rotating—270 degrees

DESCRIPTION

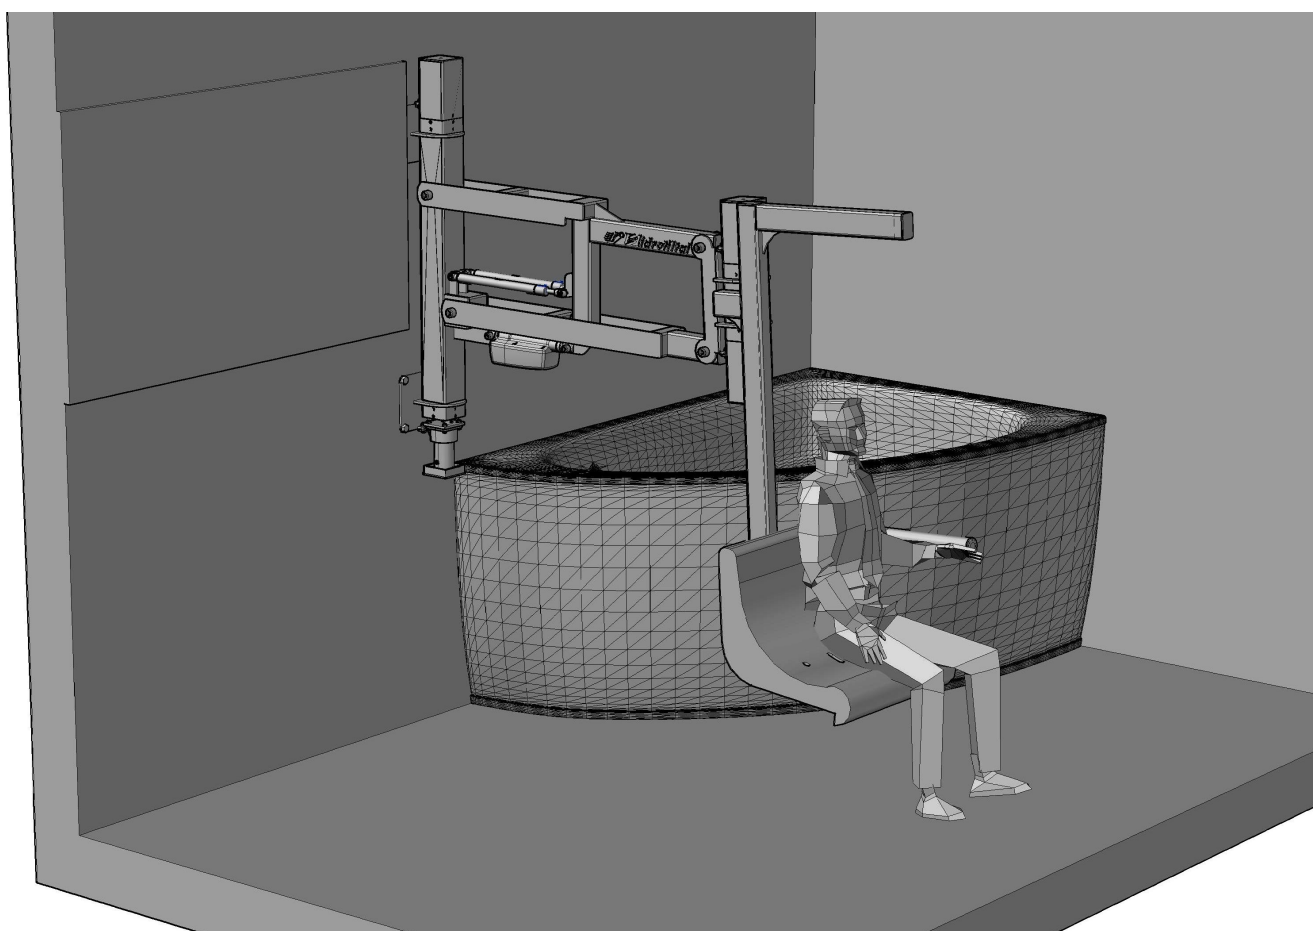

SCHEMA



ADVANCED LOADING ASSISTANT




SCISSORS LIFTS
FOR DISABLED
PEOPLE

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50 , 55-asis
pastas , p/d 805 , LT-10312 ,
Vilnius , LITHUANIA.

SCHEMA

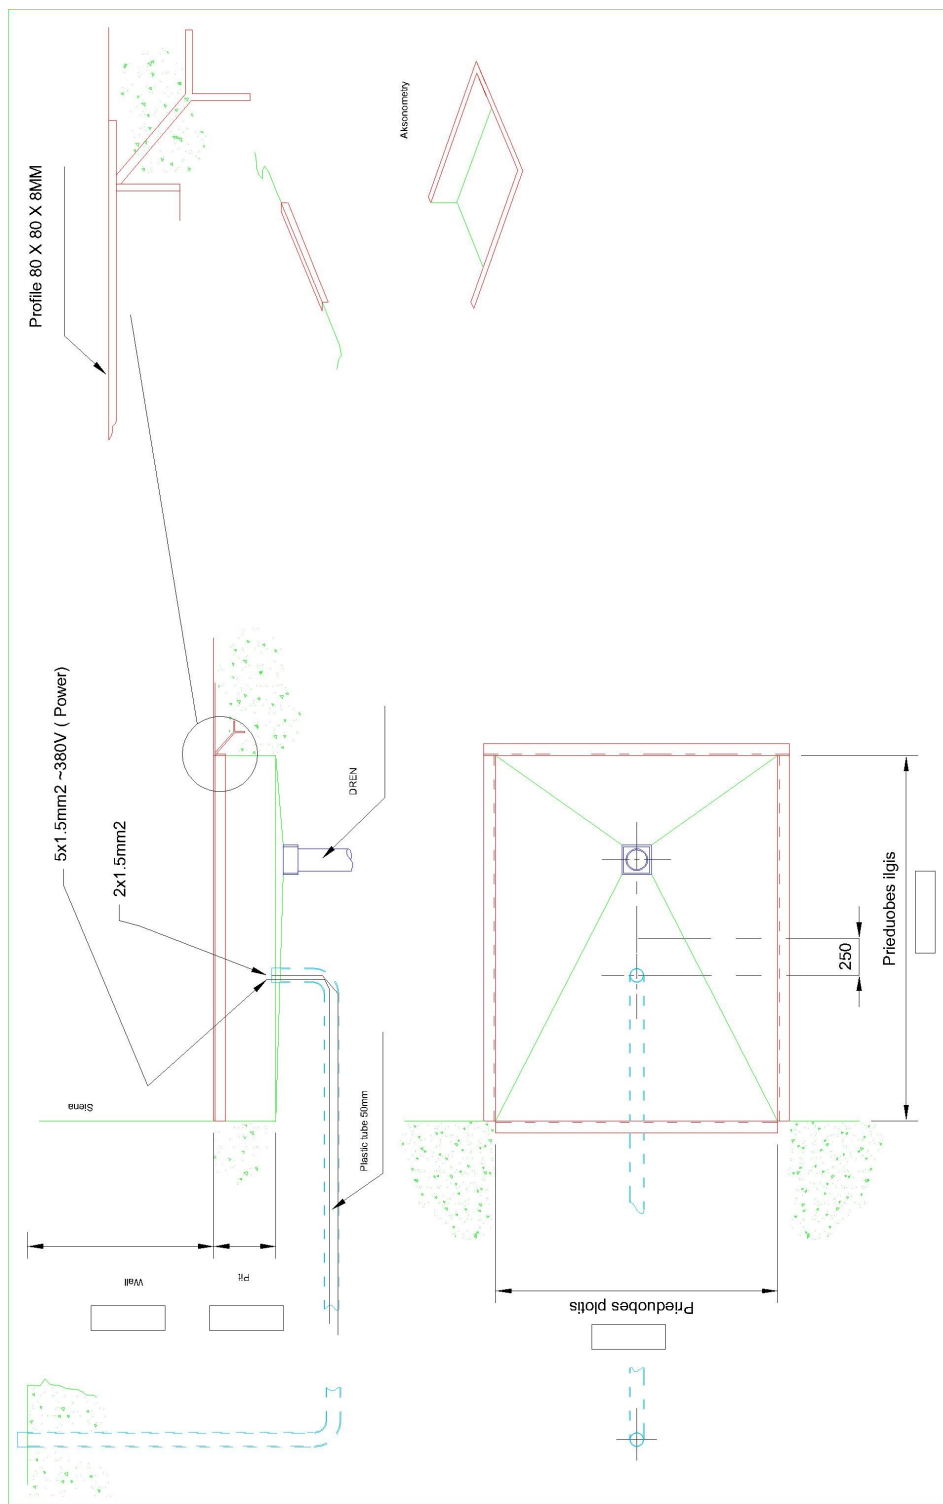

Brėžinio Nr.

ATLIKO:
Rolandas

DATA:
2014-05-15

Drawing:

Preparing for installation scheme

Modelis: HL1

UAB HIDROTILTALAI, Antakalnio 50, 55-asis pastas, p/d 805, LT-10312, VILNIUS. TEL +37065540001

Hidrotiltai

ADVANCED LOADING ASSISTANT



SCISSOR LIFTS FOR
DISABLED PEOPLE

Phone: +370 655 40001
E-mail: info@hidrotiltai.lt
Web: www.hidrotiltai.lt

Antakalnio 50, 55-asis pastas, p/d
805, LT-10312, Vilnius,
LITHUANA.